



Standard:



double skin tank
(2 tanks)



movable roof
for maintenance



sound & light
overfill alarm



stainless steel
construction
& piping



prepared electrical
cables and piping
for cards managing
system



prepared connection
to separately
standing dispenser



openings for forklift



submersible pump
with dry run
protection



2" dry break coupling
for cistern filling



mechanical
level indicator

 **for trucks & passenger cars** 

capacities: 3.000 • 4.000 • 6.000 ltr

Options:



on / off pump
key switch




telemetry



sound & light
leakage alarm



your branding



heating/
cooling system
(depends on
climate
conditions)

CAPACITIES, DIMENSIONS & WEIGHT

FRONT PANEL



SIDE PANELS



TECHNICAL SPECIFICATION


Power Supply	1 x 230V / 50 Hz
Dry Break Coupling	DN d-50 mm
Heating	102 - 153 W
Overfill Protection	230 V / 50 Hz
Cable Connection	3 x 1,5 mm ²
Operating Conditions	- 20°C - + 45°C

CONNECTION and CAPACITY POSSIBILITIES (connected Storage up to 12.000 lit.)

All **storage** tanks can be connected with dispensers from:
Gilbarco, Tokheim, Dresser Wayne, Adast, Petrotec
or any other free standing dispenser (calibrated or not).

MATERIALS

External tank	fiberglass
Inner tank	polyethylene
Pipes	stainless steel

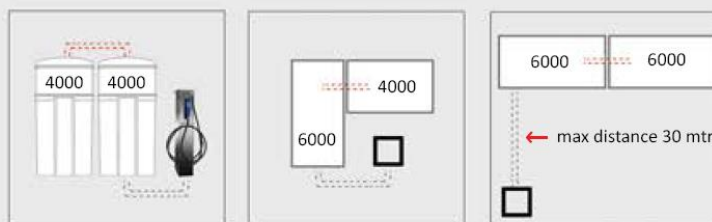

Vandotec NV
Nijverheidsstraat 49
B-8970 Poperinge

Tel. +3257335251
Fax. +3257333161
E-mail: info@vandotec.be
website: www.vandotec.be